

STANDARD FLEXIBLE SLEEVE


4.2

ELYKIT

FLEXIBLE CONNECTION

The smooth flexible sleeve delivered in KIT includes a circular sleeve and two galvanized steel clamps in a blister.

It is designed to connect aeraulic ducts or circular fans. Its design allows easy installation.

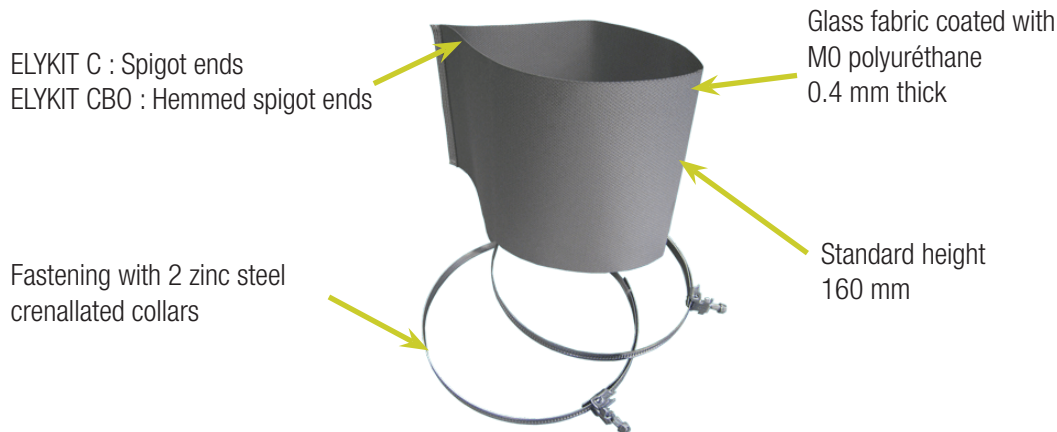

	Characteristics
Fire classification	Fire M0 - Smoke F0 400°C/2h certified according to the EFECTIS (CTICM) laboratory
Acceptable pressure	1 000 Pa
Operating temperature	- 30°C to + 130°C

DIMENSIONS

Standards diameters EUROVENT : from 80 to 1250 mm

Standard height : 160 mm

OPTIONS

- ELYKIT V : two layers of fabric that withstand up to 2500 Pa
- Other fabrics on request
- Other heights on request
- Personalized labels