



### INSULATED (CI) HOSE CLAMP

Hose clamp in galvanized steel for circular duct suspension.  
Quick closing system for Ø400 clamps and smaller. Easy to install.  
Hose clamp equipped with seals.

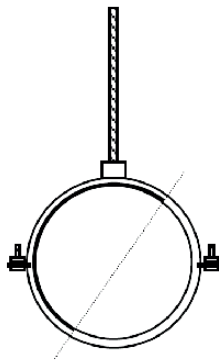

Quick closing for Ø400 and smaller:

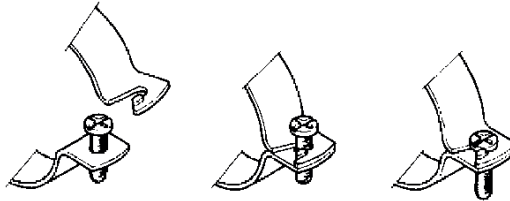

### CHARACTERISTICS

	Ø400 and smaller	>Ø400
Strip iron (material)	Galvanized steel	
Strip iron (Thickness / Width)	1.8 / 20 mm	2.5 / 25 mm
Lateral fastening (Quick fittings)	M6 x 20	
Lateral fastening (2 perforations Ø11 mm, clamp supplied with screws and bolts)	M10 x 25	
Strip iron: other material	Stainless steel, other Ø on request	

- Clamps equipped with seals (no trace of silicone or halogen)
- In accordance with DIN 4109 standard for acoustic absorption
- Operating temperature: from -30°C to +70°C/80°C

Information and data can not be considered as contractual. Design and data changes may occur without notice during F2A's continuous product development.